


# KRISHNASAMY

College of

## **ENGINEERING & TECHNOLOGY**

Approved by AICTE & Affiliated to Anna University

### Consultancy – Railways and Highways contractor Dated: 25.01.2022

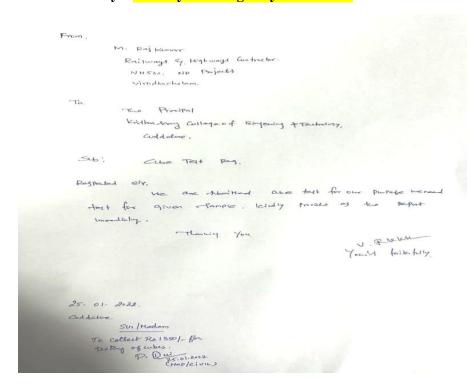

### **Inward Letter**

ANARD MAGAR MILLIKUPTAM MAIN ROAD S.KUMARAPURAM CUDDALORE 507109 Phone:04142285601 Fax:04142290394

RECEIPT

Receipt No. FC21/02809 Date : 25/01/2022

Hame : M. RAJ KUMAR/ CONTRATOR/HI Class :

Particulars Amount

TESTING CUSES 1.350.00

Total 1,350.00

Amount in Words : Rupees One Thousand Three Hundred and Cifty Only

Cashier

Bill receipt for testing





College of

# **ENGINEERING & TECHNOLOGY**

Approved by AICTE & Affiliated to Anna University



### KRISHNASAMY COLLEGE OF ENGINEERING & TECHNOLOGY

ANAND NAGAR, S.KUMARAPURAM, CUDDALORE - 607 109

### DEPARTMENT OF CIVIL ENGINEERING

Receipt No: FC21/02809 /25/01/2022

Date:31.01.2022

To

Mr.M.Rajkumar,

Railway & Highway contractor,

Thenpennai River,

Manjakuppam,

Cuddalore-607 001

E. PACRAS 9629474914

#### Test on Cement Sample

The cement sample supplied by the client were investigated and results are given in Table 1.

#### Table 1. Test on Given Cement Sample

SLNo.	Description	Values	Remarks
1	Consistency	26%	Tested results are unsatisfactory and not recommended for massive projects.
2	Initial setting time	75 minutes	
3	Final setting time	600 minutes	
4	Specific gravity	3.81	
5	Fineness of cement	5%	
- 6	Soundness test	8 mm	

Enculty In-charge

Road at the Boyareman Livil Ener. CHONAL ORE OF

Principal Fincipal Erichnesomy College at Engineering & Tochnelogy Sonji Comerapurase

Testing report for the given sample